

## BAKERY H 38

## Highlights




ENERGY-EFFICIENT



EASY-CLEAN



INDIVIDUAL DESIGN



HIGH-QUALITY MATERIALS



## TECHNICAL DESCRIPTION

→ Ideal for presentation on an incline or steps or products; for example → At least 3-sided glass enclosure required.  
cheese or bowls with delicacies.

→ Condensate: drain required on site or condensate tray as an option.

## SELF-CONTAINED

Model	Type	Item No.	Price
	BAKERY H 1,5-38-E	254 195	4.661,-
	BAKERY H 2-38-E	254 205	5.433,-
	BAKERY H 3-38-E	254 215	6.270,-
	BAKERY H 4-38-E	254 225	6.967,-
	BAKERY H 5-38-E	254 235	7.927,-
Pro	BAKERY H 1,5-38-E PRO	254 660	4.871,-
	BAKERY H 2-38-E PRO	254 661	5.676,-
	BAKERY H 3-38-E PRO	254 662	6.554,-
	BAKERY H 4-38-E PRO	254 663	7.291,-
	BAKERY H 5-38-E PRO	254 664	8.303,-

## REMOTE REFRIGERATION

Type	Item No.	Price
BAKERY H 1,5-38-Z	254 295	3.510,-
BAKERY H 2-38-Z	254 305	4.088,-
BAKERY H 3-38-Z	254 315	4.730,-
BAKERY H 4-38-Z	254 325	5.375,-
BAKERY H 5-38-Z	254 335	6.239,-
BAKERY H 1,5-38-Z PRO	254 760	3.721,-
BAKERY H 2-38-Z PRO	254 761	4.333,-
BAKERY H 3-38-Z PRO	254 762	5.014,-
BAKERY H 4-38-Z PRO	254 763	5.697,-
BAKERY H 5-38-Z PRO	254 764	6.613,-


## TEMPERATURE RANGE

Air  
+4 °CProduct  
M2: -1 °C to  
+7 °CSurroundings  
+25 °C and max.  
60 % RH

## ACCESSORIES AND OPTIONS

Base deck 400 x 600 mm, flat	each	253 679	59,-
Electrical condensate evaporation tray (1000 W)		190 220	667,-
Energy-optimised design for evap. @ -6 °C (only for remote refrigerated models)			on request
Installation frame	surcharge		see p. 194
Mirror on the discharge side			on request
Without control unit for remote refrigerated models	price reduction	253 657	241,-
Stepped presentation area 400 x 600 mm		253 677	118,-
Condensate tray for emptying		253 655	85,-
With 3-sided glass enclosure			on request

**SELF-CONTAINED** ( remote refrigerated = w/o condensing unit )

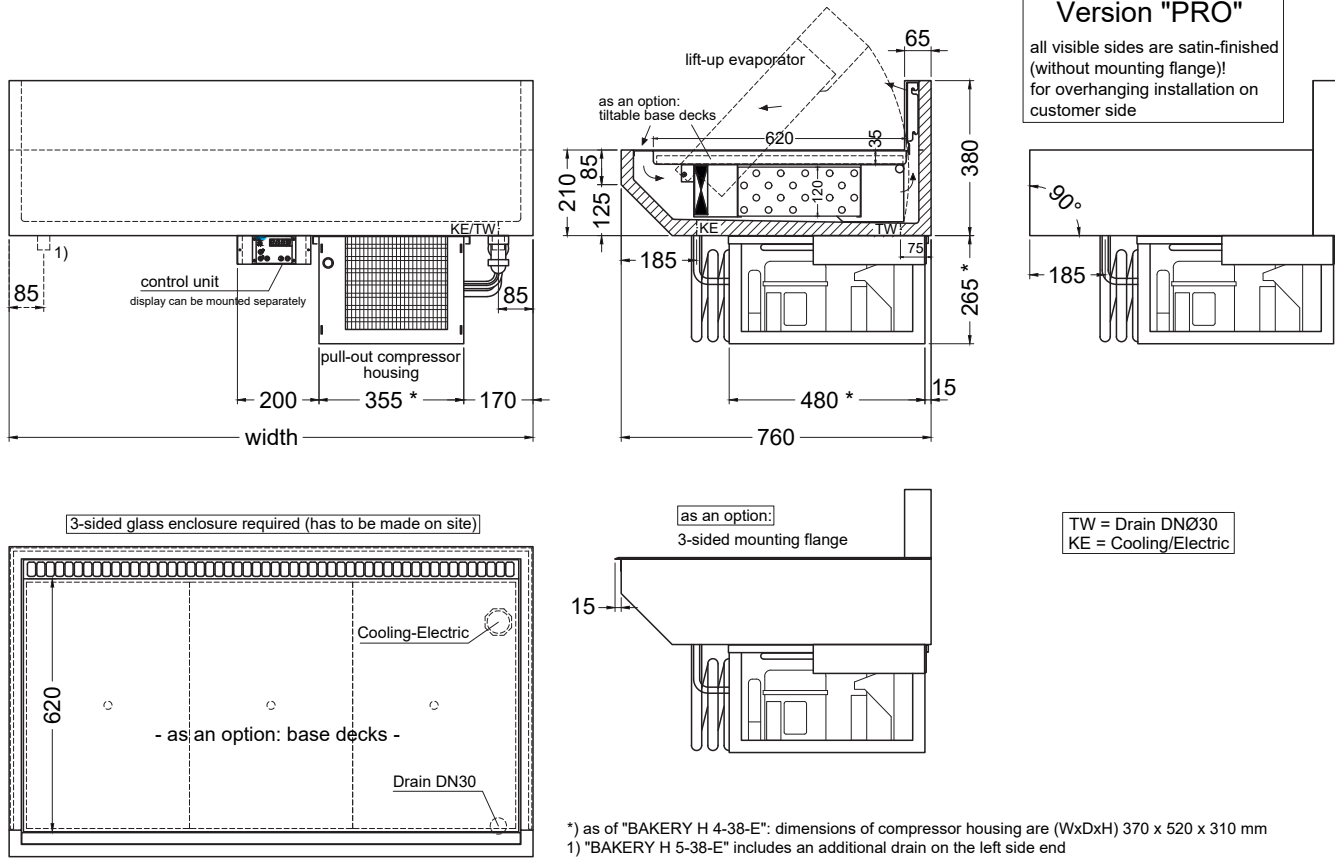

**TECHNICAL DATA**

Dimensions in mm	BAKERY H 1,5-38	BAKERY H 2-38	BAKERY H 3-38	BAKERY H 4-38	BAKERY H 5-38
<b>SELF-CONTAINED</b>					
Outside dimension width x depth x height	680 x 760 x 645	880 x 760 x 645	1285 x 760 x 645	1690 x 760 x 690	2095 x 760 x 690
Presentation area width x depth	610 x 620	810 x 620	1215 x 620	1620 x 620	2025 x 620
Air temperature range	+4 °C				
Refrigeration capacity evap. @ - 10 °C	370 W	480 W	600 W	700 W	825 W
Refrigerant	R134a				
Power input	335 W	490 W	530 W	620 W	720 W
Energy consumption / 24h	4,82 kWh	7,06 kWh	7,63 kWh	8,93 kWh	10,37 kWh
Voltage	230 V 50 Hz				
<b>REMOTE REFRIGERATION</b>					
Outside dimension width x depth x height	680 x 760 x 380	880 x 760 x 380	1285 x 760 x 380	1690 x 760 x 380	2095 x 760 x 380
Presentation area width x depth	610 x 620	810 x 620	1215 x 620	1620 x 620	2025 x 620
Air temperature range	+4 °C				
Refrigeration capacity evap. @ - 10 °C	370 W	480 W	600 W	700 W	825 W
Refrigerant	R134a				
Power input	20 W				
Voltage	230 V 50 Hz				