

SPECIFICATIONS

Winston CVap Hold/Serve Drawer, model HBB0D2 with electronic differential controls to provide food temperature control from 90 to 180°F (32 to 82°C) and maintain food texture with settings from 90 to 180°F (32 to 82°C). 250°F (121°C) maximum drawer temperature. Utilizes Controlled Vapor Technology (patent #5,494,690) as a method and apparatus for holding hot foods, consisting of an air heater and water heater to establish ideal water vapor content that is in relation with the moistness characteristics for the food.
Electronic differential control allows precise control of food texture.
2 Steam Table Pan (12" x 20" x up to 6") 4 Half Steam Table Pan (12" x 10" x up to 6") 6 Third Steam Table Pan (12" x 7" x up to 6") 2 Gastronorm Pan 1/1
20 lbs. (9.07 kg.) per rack.
Supplied with 84" (2,134 mm) (minimum) power cord and plug.
Accepts two full steam table pans (up to 6" (152 mm) deep), four half steam table pans, six third steam table pans, or two 1/1 gastronorm pans. Easy to remove and replace.
To be commercial and institutional grade stainless steel interior and exterior to provide ease of cleaning and long service life with reasonable use and care. Full-perimeter insulation.
Operated manually. Low mineral potable water is recommended, otherwise use deionizer/demineralizer to minimize corrosive damage.
Units to be installed with 2" (51mm) clearance on sides and may not be installed within proximity to anything omitting heat that would allow the exterior of the Winton cabinet to exceed surface temperatures of >200°F. Refer to owner's manual for specific installation requirements. Generally, this equipment is not required to be installed under Type 1 or Type 2 Hoods; however, check local health and fire codes for requirements specific to the location.



HBBOD2 CVAP HOLD/SERVE DRAWER Electronic Differential Controls

> TWO DRAWER MODEL FANLESS(SHOWN)



CVap® Hold/Serve Drawers are designed for high quality holding and serving of a wide variety of menu items for extended times. They are ideal for holding, warming, and serving.




Catering Equipment Limited, Unit 1, Block G, Greenogue Business Park, Rathcoole, Co. Dublin. T: 353 (0)1 401 9011 E: sales@caterline.ie W: www.caterline.ie



HBB0D2

CVap® Hold/Serve | Two Drawer Model

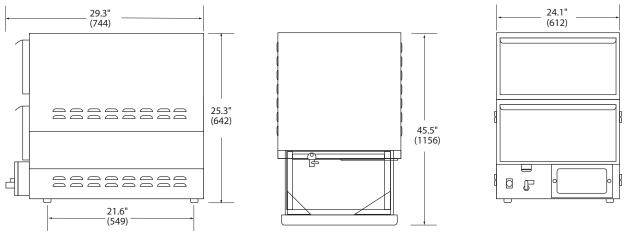

Side

Front

									Drawings not to scale.
capacity	size in (mm)	volts	hertz	ph	amps	watts	nema	ship wt. Ib (kg)	ship cube
						US	/ CANADA		
2 STP 4 Half STP 6 Third STP 2 GP 1/1	H= 25.3" (642) H4= 29.3" (744) H6= 31.3" (795) W= 24.1" (612)	120	60	1	12.0	1440	US 5-15P	140 (64)	11.7 (0.33)
	D= 29.3" (744) to					INT	ERNATIONAL		
Accepts up to 6" deep pans		230*	50/60	1	6.3	1440	N/A	140 (64)	call factory

Plan

STP= Steam Table Pan (12" x 20" x 2.5") • GP= Gastronorm Pan • H4= Height w/4" legs • H6= Height w/6" legs

CONTROLLED VAPOR TECHNOLOGY (U.S. patent SPECIFY THE FOLLOWING WHEN ORDERING: # 5,494,690) establishes that the water vapor content in the

drawer is the same as that of the food. This unique process controls moisture evaporation and saturation, so crisp foods stay crisp, and moist foods stay moist.

EASY-TO-USE CONTROLS Two electronic differential control key sets are easy to understand and reliable. These controls never need field calibration.

FOOD TEMP KEYS allow control of food temperature from 90 to 180°F (32 to 82°C).

FOOD TEXTURE KEYS maintain just-cooked texture. Set near food temperature for moist foods, or set higher for crisp foods. 250°F (121° C) maximum drawer temperature.

BUILT TO LAST WITH QUALITY CRAFTSMANSHIP, Built to last with quality craftsmanship, high grade stainless steel construction and full perimeter insulation.

ALLOWS FOR BETTER CONTROL OF FOOD QUALITY, hold your menu items at just-cooked quality and precise serving temperatures for extended times.

INDUSTRY COMPLIANT, CVap equipment complies with domestic and international requirements such as UL, C-UL, UL Sanitation, CE, NSF, and others.

WARRANTY. Limited one year warranty. Warranty disclaimer for failure to clean. Ask for complete warranty disclosure.

Standard (No additional cost):

1. Feet: 1/2" (13 mm) *Inquire about additional international voltages available

Optional (Additional cost):

- 1. Legs: 4" (102 mm) legs or 6" (152 mm) legs
- 2. Extended Warranty: Adds parts and labor warranty coverage for one additional year
- 3. Added accessories or supplies

Accessories & Supplies (Additional cost): PS2212 Perforated tray

BUY WINSTON SERVICE PARTS, ACCESSORIES, AND SUPPLIES ONLINE! Factory direct at winstonind.com/buyparts

